

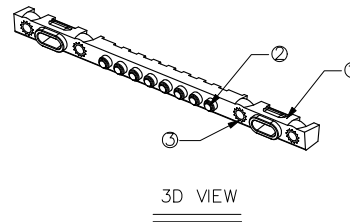
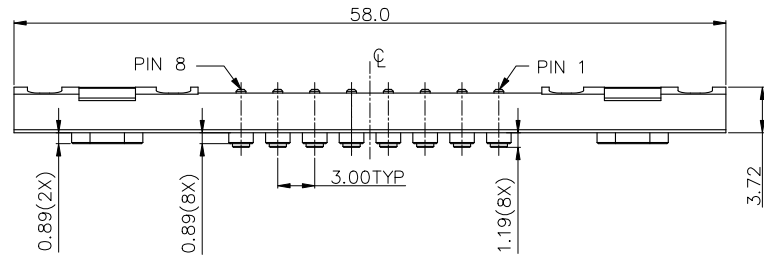

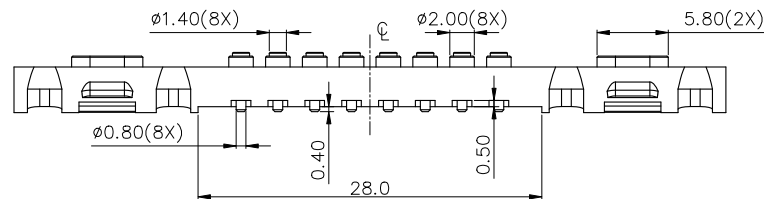


REV.	ECN. NO.	APPD.
A	ECN191204006	River Yao

RoHS HF






- NOTES:
- ELECTRICAL CHARACTERISTICS:
 - EACH CONTACT CURRENT RATING: 3 A MAX.
 - CONTACT RESISTANCE: 50mΩ MAX.
 - INSULATION RESISTANCE: 100 MΩ MIN.
 - WITHSTANDING VOLTAGE: 250 V AC.
 - MECHANICAL SPECIFICATION:
 - DURABILITY: 20000 CYCLES(MIN.).
 - ENVIRONMENT SPECIFICATION:
 - OPERATING TEMPERATURE: -10°C TO +50°C
 - THE ANTI-TORQUE OF NUT IS 1.20Kgf*cm MIN..
 - TO ENSURE THE BEST USAGE,PLEASE OPERATE IT BASED ON THE WORKING HEIGHT STROKE.SHALL NOT EXCEED THE MAX ALLOWED COPPRESSION.
 - THE DATE CODE IS APPROXIMATELY AS BELOW: Y WW YEAR WEEK
 - DIMENSIONS SHALL BE INTERPRETED PER ASME Y14.5M-1994

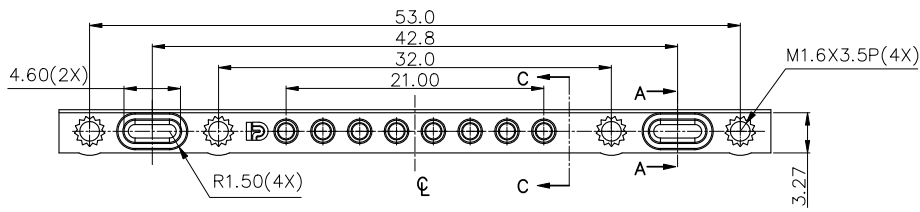

PO: POGO
 R: RECEPTACLE
 08: 8 POS
 A: 10u" MIN.GOLD PLATING
 3: 3.00mm PITCH
 1: 1 ROWS

H: HALOGEN FREE & LEAD FREE
 1: TAPE AND REEL
 0: RESERVED CODE
 1: DIP TYPE
 0: BLACK

PO R 08 A - 3 1 0 1 0 - 1 H

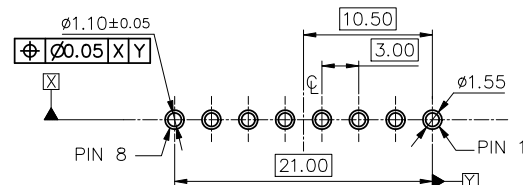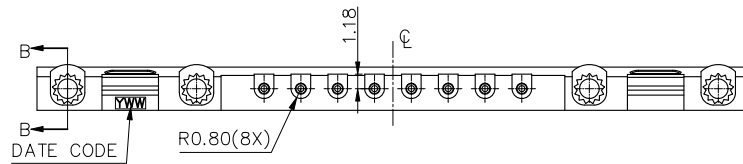




RECOMMEND FPC LAYOUT TOLERANCE: +/-0.05mm
 RECOMMEND FPC THICKNESS IS 0.20mm

3	I/M: NUT	4	COPPER	50u" MIN Ni PLATING
2	CONTACT	8	BRASS	10u" MIN GOLD PLATING OVER 50u" MIN Ni PLATING
1	I/M: HOUSING	1	HTN UL: 94V-0	MOLDED COLOR: BLACK
ITEM	DESCRIPTION	Q'TY	MATERIAL	FINISH
UNITS: mm	GENERAL TOLERANCE		APPROVED: River Yao	PART NO.: POR08A-31010-1H
DATE: 12/05'19	X. ±0.50	X.* ±3'	CHECKED: Wes Wu	TITLE: CUSTOMER DRAWING FOR 8PIN POGO PIN
SCALE: N/A	.X ±0.30	.X* ±2'	DRAWING: Fei Liu	DRAWING NO.: 820-0000-0828
SHEET: 1/2	MATERIAL: N/A	Q'TY: N/A	Highstar Drapho ELECTRONICS TECHNOLOGY CO., LTD	
REV: A	FINISH: N/A			


AUTOCAD GENERATED DRAWING, DON'T CHANGE BY HAND

RoHS HF

REV.	ECN. NO.	APPD.
------	----------	-------

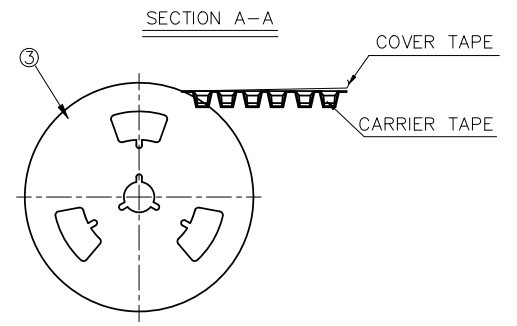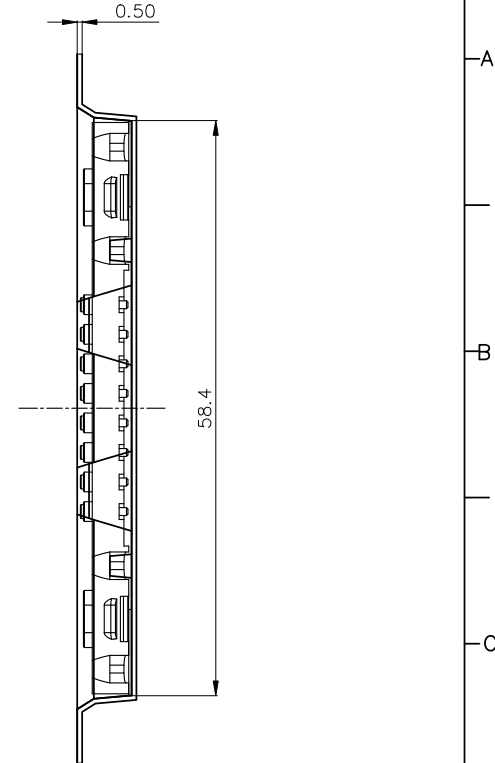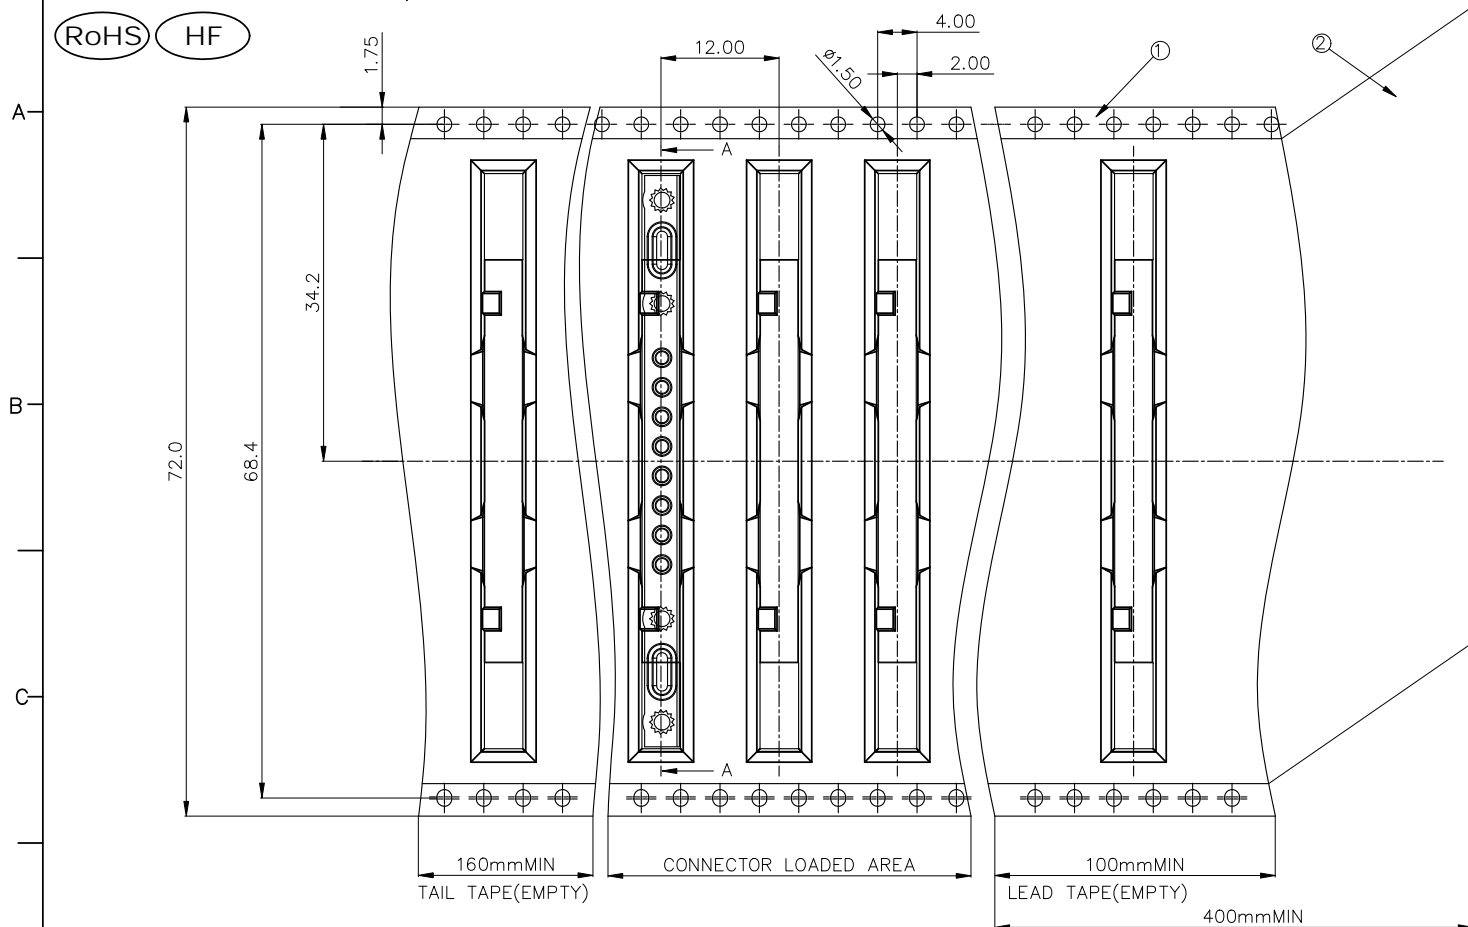


- NOTES:
- 1.DIMENSION SHALL BE INTERPRETED PER ASME Y14.5M-1994
 - 2.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE±0.20MM
 - 3.COVER TAPE PEELING STRENGTH :10Gf-150Gf
 - 4.THE COVER TAPE SHALL BE PULLED WITH A VELOCITY OF 100mm-300mm/MINUTE TO CARRIER TAPELED .

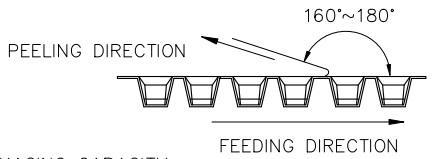


3.PACKAGING CAPACITY:

P/N	PCS/REEL	REEL/BOX	PCS/BOX
POR08A-31010-1H	1000	4	4000



ITEM	DESCRIPTION	MATERIAL
③	REEL	POLYSTYRENE
②	COVER TAPE	POLYSTYR
①	CARRIER TAPE	POLYSTYRENE

UNITS: mm	GENERAL TOLERANCE	APPROVED: River Yao	PART NO.: POR08A-31010-1H
DATE: 12/05'19	X. ±0.50 .X ±0.30 .XX ±0.20	CHECKED: Wes Wu	TITLE: CUSTOMER DRAWING FOR 8PIN POGO PIN
SCALE: N/A	X.* ±3* .X.* ±2*	DRAWING: Fei Liu	DRAWING NO.: 820-0000-0828
SHEET: 2/2	MATERIAL: N/A	 Highstar Drapho ELECTRONICS TECHNOLOGY CO., LTD	
REV. A	FINISH: N/A		